

15W	Colour Temp (K)	2700	3000	4000
	Luminous Flux @ 60° (lm)	1151	1233	1243

LED COLOUR

- 27 2700K
- 30 3000K
- 40 4000K

BEAM ANGLE

- 40 40°
- 60 60°

FINISH

- MW Matt White

INCLUDED DRIVER

- FO Fixed Output
- LT Leading & Trailing Edge

PRODUCT CODE

LT-Down-17/15 / / /



APPLICATIONS

Designed for use in retail, bars, shopping centres, public buildings, office and residential – the LT-Down-17/15 luminaire offers ambient lighting at its best.

DESCRIPTION

The LT-Down-17/15 is IP54 rated downlight that is ideal to be used in wet environments. Beautifully engineered to provide a smooth distribution, this downlight can be applied in a wide variety of architectural applications.

This luminaire is available in a white finish and is manufactured complete with plug-and-play cable for easy installation.

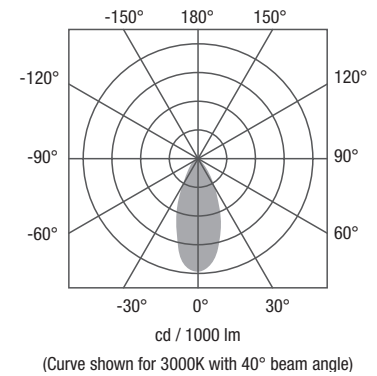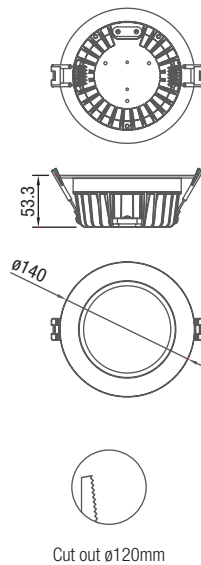

1m	1569 lx	0.8m ø
2m	392 lx	1.5m ø
3m	174 lx	2.3m ø
4m	98 lx	3.1m ø
5m	62 lx	3.8m ø

FEATURES

- IP54
- Clean and neat outlooking design
- Uses Bridgelux COB - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output and leading and trailing edge dimming systems

Parameter	Specification		
Light Source	Bridgelux COB		
Power Consumption (W)	15		
LED Current (mA)	DC 450		
Operating Voltage (V)	AC 100-240V 50/60Hz		
Colour Temperature (K)	2700	3000	4000
Luminous Flux @ 40° (lm)	1119	1207	1218
Luminous Flux @ 60° (lm)	1151	1233	1243
CRI (Ra)	> 80		
Lifetime (Hrs)	50,000		
Ingress Protection (IP)	54		
Driver Options	Fixed Output, Leading & Trailing Edge Dimming		