

8W	Colour Temp (K)	3000	4000
	Luminous Flux @ 90° (lm)	565	685

PRODUCT CODE

LT-Down-19/8 IP65 / / / /

LED COLOUR

30 3000K
40 4000K

BEAM ANGLE

90 90°

FINISH

MW Matt White
S Silver

INCLUDED DRIVER

FO Fixed Output
LT Leading & Trailing Edge
10 1-10V Dimming
DL DALI Dimming



APPLICATIONS

Designed for use in retail, bars, shopping centres, public buildings, office and residential.


DESCRIPTION

The LT-Down-19/8 IP65 is a low-profile recessed downlight ideal for use in areas with shallow ceiling depth. Featuring an evenly distributed 90° beam angle, this downlight can be applied in a wide variety of architectural applications.

This luminaire is available in a matt white or silver finish and is manufactured complete with plug-and-play cable for easy installation.

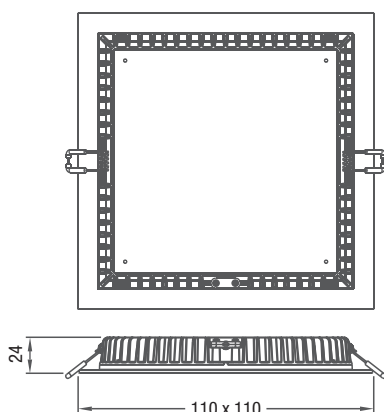

Cut out 95 x 95mm

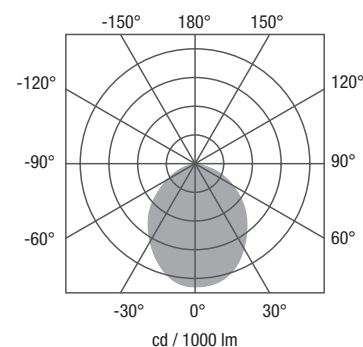

(Curve shown for 3000K with 90° beam angle)

1m	215 lx	2.2m ø
2m	54 lx	4.5m ø
3m	24 lx	6.7m ø
4m	13 lx	8.9m ø
5m	9 lx	11.1m ø

FEATURES

- IP20 or IP65
- Clean and neat outlook design
- Uses 4014 SMD LED - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output, leading and trailing edge dimming, 1-10V dimming, and DALI dimming systems
- Standard with an opal diffuser. An alternate anti-glare MPO (Micro Prism Optic) diffuser is also available upon request.

Parameter		Specification	
Light Source		4014 SMD LED	
Power Consumption	(W)	8	
LED Current	(mA)	DC 350	
Operating Voltage	(V)	AC 100-240V 50/60Hz	
Colour Temperature	(K)	3000	4000
Luminous Flux @ 90°	(lm)	565	685
CRI	(Ra)	> 80	
Lifetime	(Hrs)	50,000	
Ingress Protection	(IP)	20 (65 available on request)	
Diffuser		Opalised (anti-glare MPO available on request)	
Driver Options		Fixed Output, Leading & Trailing Edge Dimming, 1-10V Dimming, DALI Dimming	