



23W	Colour Temp (K)	3000	4000
	Luminous Flux @ 90° (lm)	1820	1875

LED COLOUR
30 3000K
40 4000K

BEAM ANGLE
90 90°

FINISH
MW Matt White

INCLUDED DRIVER
FO Fixed Output
LT Leading & Trailing Edge

PRODUCT CODE
 LT-Down-24/23 / / / /

APPLICATIONS

The clean design of the Asteri range make them perfectly suited for installation in any setting, such as in retail, bars, shopping centres, public buildings, office and residential.





DESCRIPTION

The LT-Down-24/23 is a low-profile ceiling mounted downlight that features an evenly distributed 90° beam angle and an opalised diffuser making this downlight suitable for a wide variety of architectural applications.

This luminaire is available in a white finish and is manufactured complete with plug-and-play cable for easy installation.

FEATURES

- IP20
- Clean and neat outlook design
- Uses 4014 SMD LED - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output and leading and trailing edge dimming systems

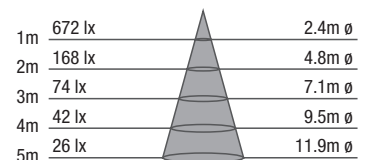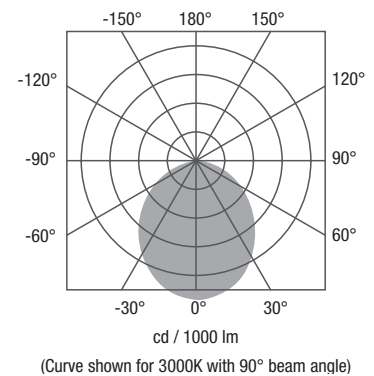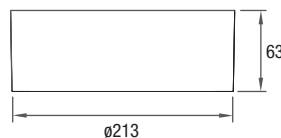

Parameter	Specification	
Light Source	4014 SMD LED	
Power Consumption (W)	15	
LED Current (mA)	DC 350	
Operating Voltage (V)	AC 100-240V 50/60Hz	
Colour Temperature (K)	3000	4000
Luminous Flux @ 90° (lm)	1820	1875
CRI (Ra)	> 80	
Lifetime (Hrs)	50,000	
Ingress Protection (IP)	20	
Driver Options	Fixed Output, Leading & Trailing Edge Dimming	