



9W	Colour Temp (K)	2700	3000	4000
	Luminous Flux @ 38° (lm)	486	496	520

LED COLOUR

- 27 2700K
- 30 3000K
- 40 4000K

BEAM ANGLE

- 15 15°
- 24 24°
- 38 38°
- 60 60°

FINISH

- MW Matt White
- MB Matt Black

INCLUDED DRIVER

- FO Fixed Output
- LT Leading & Trailing Edge
- 10 1-10V Dimming

PRODUCT CODE

LT-Down-5/9/ / / /

APPLICATIONS

Designed to function as an accent light for numerous and varied applications such as retail displays, bars, shopping centres, public buildings, office and residential.



DESCRIPTION

The LT-Down-5/9 uses the latest Bridgelux COB LEDs and features an inner baffle for anti-glaring, an adjustable tilt up to 23°, and a fluted bezel whose curvature allows for a wide distribution of light and creates a bloom effect as the lamp is dimmed.

This luminaire is constructed from die-cast aluminium with a white or black matt finish and is manufactured complete with plug-and-play cable for easy installation.

FEATURES

- IP20
- Clean and neat outlooking design
- Uses Bridgelux COB LED - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output, leading and trailing edge dimming, and 1-10V dimming systems

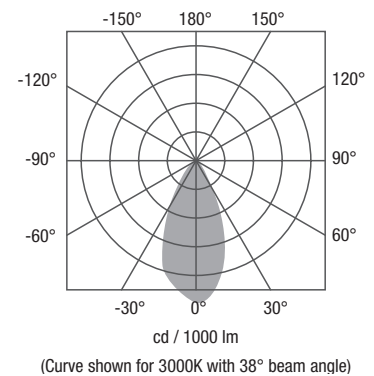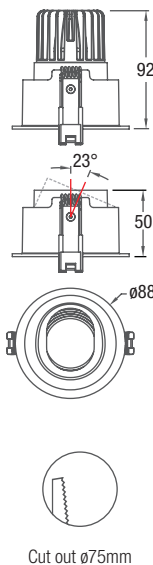

1m	987 lx	0.8m ø
2m	246 lx	1.5m ø
3m	109 lx	2.3m ø
4m	61 lx	3.0m ø
5m	39 lx	3.8m ø

Parameter		Specification		
Light Source		Bridgelux COB		
Power Consumption	(W)	9		
LED Current	(mA)	DC 400		
Operating Voltage	(V)	AC 100-240V 50/60Hz		
Colour Temperature	(K)	2700	3000	4000
Luminous Flux @ 15°	(lm)	502	518	535
Luminous Flux @ 24°	(lm)	482	498	517
Luminous Flux @ 38°	(lm)	486	496	520
Luminous Flux @ 60°	(lm)			
CRI	(Ra)	> 80		
Lifetime	(Hrs)	50,000		
Ingress Protection	(IP)	20		
Driver Options		Fixed Output, Leading & Trailing Edge Dimming, 1-10V Dimming		