



15W	Colour Temp (K)	2700	3000	4000
	Luminous Flux @ 55° (lm)	970	1040	1120

LED COLOUR

- 27 2700K
- 30 3000K
- 40 4000K

BEAM ANGLE

- 20 20°
- 40 40°
- 55 55°

FINISH

- MW Matt White
- MB Matt Black

INCLUDED DRIVER

- FO Fixed Output
- LT Leading & Trailing Edge
- 10 1-10V Dimming
- DL DALI Dimming

PRODUCT CODE

LT-Down-6/15/ / / /






APPLICATIONS

Designed to function as an accent light for numerous and varied applications such as retail displays, bars, shopping centres, public buildings, office and residential.

DESCRIPTION

The LT-Down-6/15 uses the latest Bridgelux COB LEDs and features a fixed tilt angle and a fluted bezel whose curvature allows for a wide distribution of light and creates a bloom effect as the lamp is dimmed.

This luminaire is constructed from die-cast aluminium with a white or black matt finish and is manufactured complete with plug-and-play cable for easy installation.

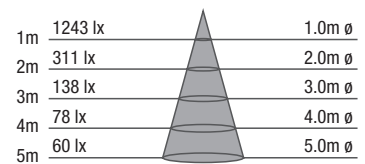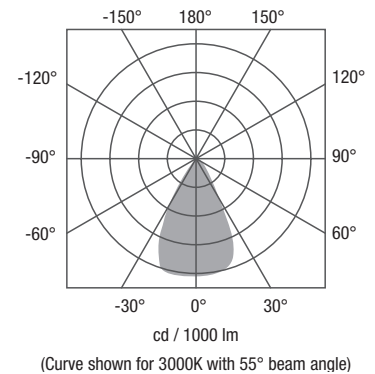

FEATURES

- IP20
- Clean and neat outlooking design
- Uses Bridgelux COB LED - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output, leading and trailing edge dimming, and 1-10V dimming systems

Parameter	Specification		
Light Source	Bridgelux COB (Vero 10)		
Power Consumption (W)	15		
LED Current (mA)	DC 450		
Operating Voltage (V)	AC 100-240V 50/60Hz		
Colour Temperature (K)	2700	3000	4000
Luminous Flux @ 20° (lm)	975	1035	1030
Luminous Flux @ 40° (lm)	960	1010	1040
Luminous Flux @ 55° (lm)	970	1040	1120
CRI (Ra)	> 80		
Lifetime (Hrs)	50,000		
Ingress Protection (IP)	20		
Driver Options	Fixed Output, Leading & Trailing Edge Dimming, 1-10V Dimming, DALI Dimming		