



35W	Colour Temp (K)	2700	3000	4000
	Luminous Flux @ 60° (lm)	2631	2683	2820

LED COLOUR

- 27 2700K
- 30 3000K
- 40 4000K

BEAM ANGLE

- 15 15°
- 20 20°
- 40 40°
- 60 60°

FINISH

- MW Matt White

INCLUDED DRIVER

- FO Fixed Output
- LT Leading & Trailing Edge
- 10 1-10V Dimming
- DL DALI Dimming

PRODUCT CODE

LT-Down-7/35/ / / /

APPLICATIONS

This range of LED downlights are perfectly suited in locations where area lighting is required such as retail displays, bars, shopping centres, public buildings, offices, and residential.



DESCRIPTION

The LT-Down-7/35 recessed downlight offers a powerful light source that is smoothly distributed by a well designed reflector and optical lens.

This luminaire is available in a white finish and is manufactured complete with plug-and-play cable for easy installation.

FEATURES

- IP20
- Clean and neat outlooking design
- Uses Bridgelux COB- low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output and leading and trailing edge dimming systems

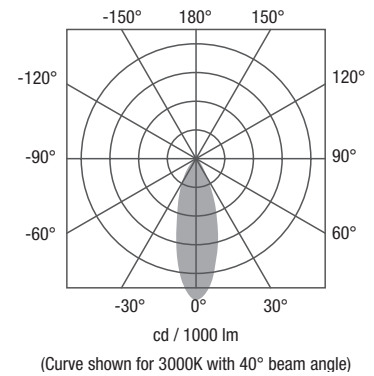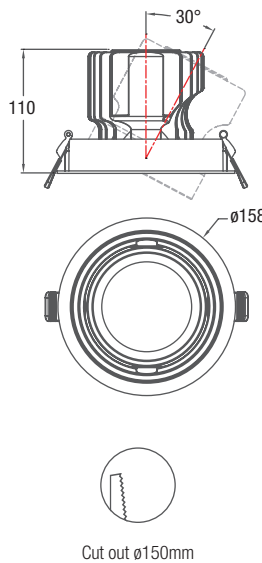

1m	5465 lx	0.6m ø
2m	1366 lx	1.2m ø
3m	607 lx	180.4m ø
4m	341 lx	240.6m ø
5m	218 lx	300.7m ø

Parameter	Specification		
Light Source	Bridgelux COB		
Power Consumption (W)	35		
LED Current (mA)	DC 900		
Operating Voltage (V)	AC 100-240V 50/60Hz		
Colour Temperature (K)	2700	3000	4000
Luminous Flux @ 15° (lm)	2932	3020	3171
Luminous Flux @ 20° (lm)			
Luminous Flux @ 40° (lm)			
Luminous Flux @ 60° (lm)	2631	2683	2820
CRI (Ra)	> 80		
Lifetime (Hrs)	50,000		
Ingress Protection (IP)	20		
Driver Options	Fixed Output, Leading & Trailing Edge Dimming, 1-10V Dimming, DALI Dimming		