



15W	Colour Temp (K)	2700	3000	4000
	Luminous Flux @ 40° (lm)	960	1010	1040

LED COLOUR

- 27 2700K
- 30 3000K
- 40 4000K

BEAM ANGLE

- 20 20°
- 40 40°
- 60 60°

FINISH

- MW Matt White
- MB Matt Black

INCLUDED DRIVER

- FO Fixed Output

PRODUCT CODE

LT-Track-1/ / / /




APPLICATIONS

Designed for use in 3-circuit track systems typically found in retail stores, shopping centres, public buildings, and offices.

DESCRIPTION

The LT-Track 1 tracklight is an accent light designed to create texture, focus and shape to general lighting. It can be used to provide dramatic effect by creating highlights and shadows.

This luminaire is available in a white or black finish and is manufactured complete with 4-pin connector to fit 3-circuit track.

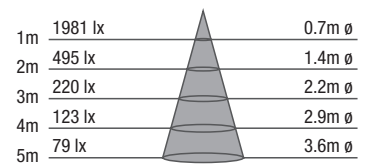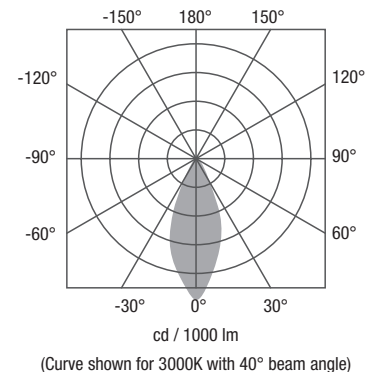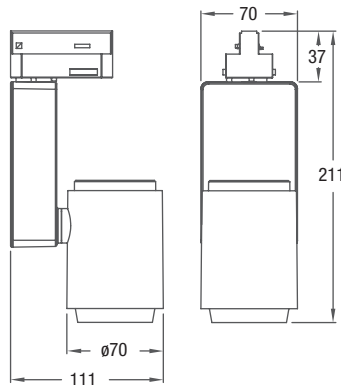

FEATURES

- IP20
- Clean and neat outlooking design
- Uses Bridgelux COB LED - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output 3-circuit track systems

Parameter	Specification		
Light Source	Bridgelux COB LED		
Power Consumption (W)	15		
LED Current (mA)	DC 500		
Operating Voltage (V)	AC 100-240V 50/60Hz		
Colour Temperature (K)	2700	3000	4000
Luminous Flux @ 20° (lm)	975	1035	1030
Luminous Flux @ 40° (lm)	960	1010	1040
Luminous Flux @ 60° (lm)	970	1040	1120
CRI (Ra)	> 80		
Lifetime (Hrs)	50,000		
Ingress Protection (IP)	20		
Driver Options	Fixed Output		